


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 23 TOWNSHIP 17 RANGE 3  
DATE: 3-20-99 10-10-04  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 2-12-93

IN. S.P.C. E ZONE, NAD 83  
NAME: 17032301  
N: 517894.3780(m)  
E: 57386.7720(m)

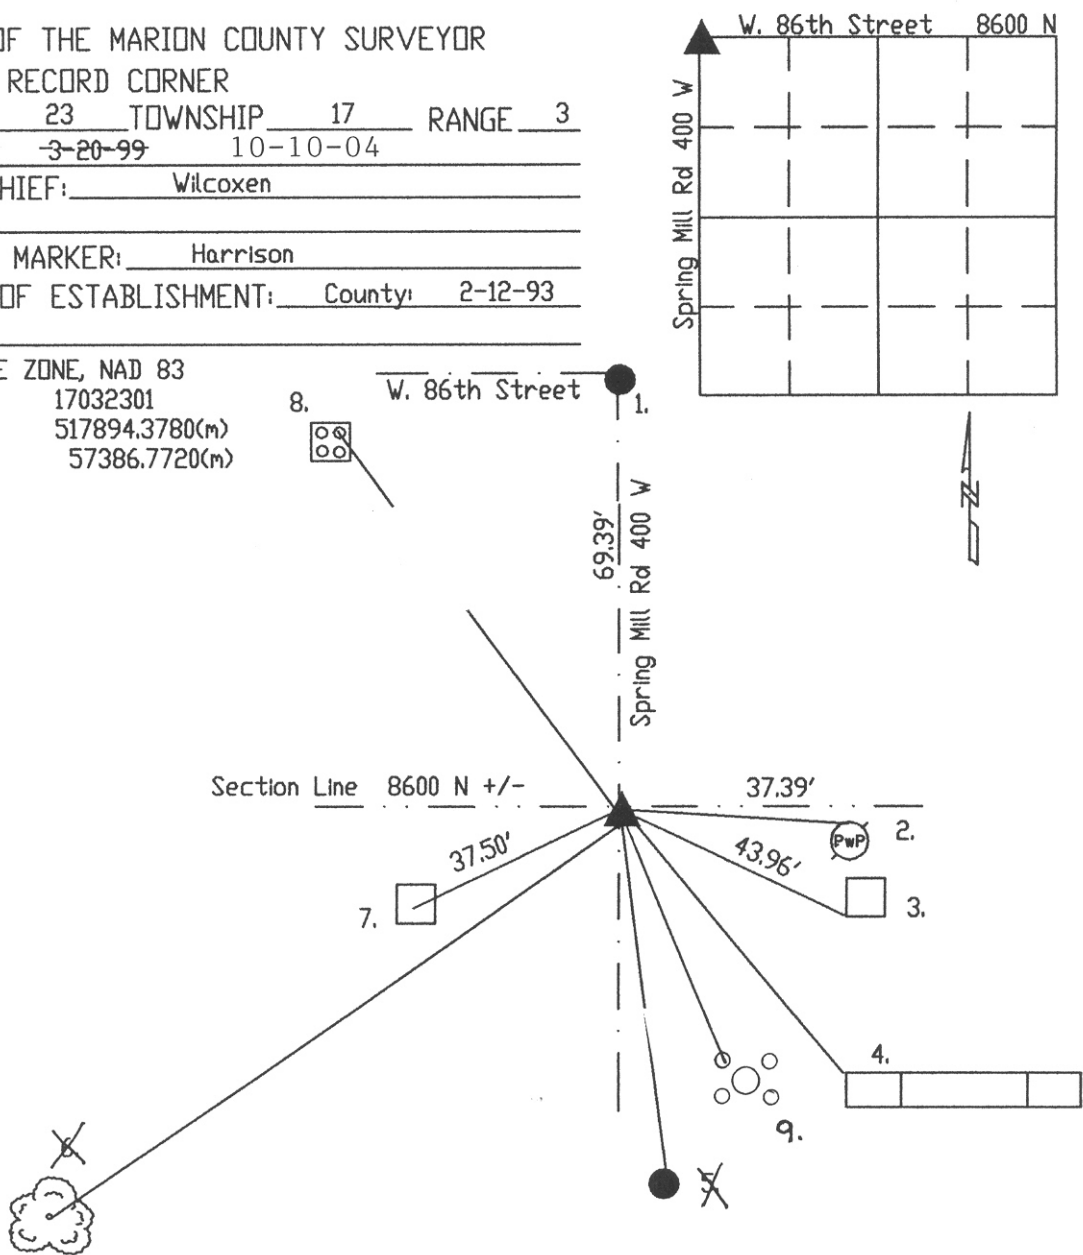

Original post set 1820 by W. B. Laughlin with witnesses: 10" sugar N 27 W 23 links, 18" beech S 20 links per Marion County Atlas pg. 8. Hosbrook 2-17-1851 called witness tree E 14 N 81.38 chains per Washington Township Legal Survey Book pg. 69. Woerner 6-22-48 called PK nail over brass plug. Schmidt 8-29-61 called brass plug. Myers 8-24-72 called brass plug. 2-27-76 Miller called same. Greene 11-19-87 called same. Excavated corner in Spring 1992 per W. 86th Street Construction Project. Set Harrison. Re-tied 3-20-99 by Wilcoxon.

HC732301

REF.	DISTANCE	DESCRIPTION
1.	69.39'	Due N to C/L of W. 86th Street 8600 N
2.	37.39'	PK nail N PwP#38=205B 3'up
3.	43.96'	SW corner traffic control box at concrete
4.	43.93'	SW brick column
5.	54.87'	PK nail curb joint
6.	103.99'	Mag nail w/MCS brass washer & shiner E 24" maple
7.	37.50'	Cut 'x' storm inlet
8.	71.29'	Cut 'x' NE-bolt traffic light pole
9.	35.06'	Cut 'x' NW bolt of aluminum pole base